


伸銅品

# タフピッチ銅 C1100

▶ 比重 8.89

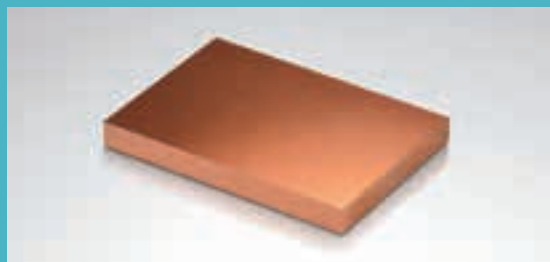


銅(Cu)99.90%以上、酸素(O<sup>2</sup>)0.02～0.05%を含むもので電気・熱伝導性(伝導率100%前後)に優れ、展延性・絞り加工性・耐食性・耐候性が良く、電線・電気用として使用されております。注意点は、「水素脆化」です。「水素脆化」とは、水素を含む還元気体中で、400℃以上に加熱すると銅中の酸化銅が還元されて水蒸気を生じこの圧力で細かな亀裂が生じ脆くなることをいいます。



伸銅品

## タフピッチ銅 平角棒



各種サイズ		長さ (mm)	調質		備考
寸法 (a × b mm)			H	1/2H	
1.2	× 12.0	3,000		◇	
1.5	× 10.0			◇	
	× 12.0		◇		
	× 15.0		◇		
	× 16.0		◇		
1.6	× 16.0		◇		
2.0	× 8.0	2,500		◇	
	× 10.0	3,000		◇	
	× 12.0			◇	
	× 15.0			◇	
	× 16.0			◇	
	× 25.0			◇	
	× 30.0			◇	
2.5	× 15.0			◇	
	× 16.0			◇	
	× 30.0			◇	
3.0	× 6.0	2,500		◇	
	× 8.0			◇	
	× 9.0			◇	
	× 10.0	3,000		◇	
	× 12.0			◇	
	× 15.0			◇	
	× 16.0			◇	
	× 18.0			◇	
× 22.0		◇			
2.0	× 10.0	5,000		◇	
	× 12.0			◇	
	× 13.0			◇	
	× 15.0			◇	
	× 20.0			◇	
	× 25.0			◇	
	× 30.0			◇	
3.0	× 10.0			◇	
	× 12.0			◇	
	× 15.0			◇	
	× 16.0			◇	
	× 18.0			◇	
	× 20.0			◇	
	× 25.0			◇	
	× 30.0			◇	
	× 35.0			◇	
	× 40.0			◇	
× 50.0			◇		
4.0	× 10.0			◇	
	× 12.0			◇	
	× 15.0			◇	
	× 16.0			◇	
	× 18.0			◇	

◇ 手配品

## タフピッチ銅 平角棒

各種サイズ		長さ (mm)	調質		備考
寸法 (a × b mm)			H	1/2H	
4.0	× 20.0	5,000		◇	
	× 25.0			◇	
	× 30.0			◇	
	× 35.0			◇	
	× 40.0			◇	
	× 50.0			◇	
	× 60.0			◇	
4.5	× 25.0			◇	
	× 30.0			◇	
5.0	× 10.0			◇	
	× 12.0			◇	
	× 15.0			◇	
	× 16.0			◇	
	× 20.0			◇	
	× 22.0			◇	
	× 25.0			◇	
	× 30.0			◇	
	× 32.0			◇	
	× 35.0			◇	
	× 40.0			◇	
	× 50.0			◇	
	× 60.0			◇	
	× 75.0			◇	
× 100.0			◇		
6.0	× 10.0			◇	
	× 12.0			◇	
	× 13.0			◇	
	× 15.0			◇	
	× 16.0			◇	
	× 19.0			◇	
	× 20.0			◇	
	× 22.0			◇	
	× 25.0			◇	
	× 30.0			◇	
	× 32.0			◇	
	× 35.0			◇	
	× 38.0			◇	
	× 40.0			◇	
	× 45.0			◇	
	× 50.0			◇	
	× 60.0			◇	
	× 65.0			◇	
	× 75.0			◇	
	× 80.0			◇	
× 100.0			◇		
6.0	× 125.0			◇	
	× 150.0			◇	
	× 200.0			◇	
8.0	× 10.0			◇	

◇手配品

## タフピッチ銅 平角棒

各種サイズ		長さ (mm)	調質		備考
寸法 (a × b mm)			H	1/2H	
8.0	× 12.0	5,000		◇	
	× 15.0			◇	
	× 18.0			◇	
	× 20.0			◇	
	× 25.0			◇	
	× 30.0			◇	
	× 32.0			◇	
	× 35.0			◇	
	× 40.0			◇	
	× 50.0			◇	
	× 60.0			◇	
	× 75.0			◇	
	× 80.0			◇	
	×100.0			◇	
	×125.0			◇	
×150.0		◇			
×200.0		◇			
10.0	× 15.0			◇	
	× 20.0			◇	
	× 25.0			◇	
	× 30.0			◇	
	× 35.0			◇	
	× 40.0			◇	
	× 50.0			◇	
	× 60.0			◇	
	× 65.0			◇	
	× 75.0			◇	
	× 80.0			◇	
	×100.0			◇	
	×125.0			◇	
×150.0		◇			
×200.0		◇			
12.0	× 20.0			◇	
	× 25.0			◇	
	× 30.0			◇	
	× 40.0			◇	
	× 50.0			◇	
	× 60.0			◇	
	× 75.0			◇	
	×100.0			◇	
	×125.0			◇	
	×150.0			◇	
	×200.0			◇	
15.0	× 20.0	5,000		◇	
	× 25.0			◇	
	× 30.0			◇	
	× 40.0			◇	
	× 50.0			◇	
	× 60.0			◇	

## タフピッチ銅 平角棒

各種サイズ		長さ (mm)	調質		備考	
寸法 (a × b mm)			H	1/2H		
15.0	× 75.0	5,000		◇		
	×100.0			◇		
	×125.0			◇		
	×150.0			◇		
	×200.0			◇		
20.0	× 25.0				◇	
	× 30.0				◇	
	× 40.0				◇	
	× 50.0				◇	
	× 60.0				◇	
	× 75.0				◇	
	×100.0				◇	
	×125.0				◇	
25.0	× 30.0				◇	
	× 40.0				◇	
	× 50.0			◇		
	× 75.0			◇		
	×100.0			◇		
30.0	× 50.0			◇		

◇手配品